

POLISHED

DESCRIPTION


This clear and homogeneous granite can be easily controlled and can even become ultra white in a thermal finish. Often used in architectural projects such as monuments and curbs in the United States because of its good structural properties and excellent durability.

QUARRY OPERATING SINCE


1912

ANNUAL PRODUCTION

On demand



PROPANE FLAMED

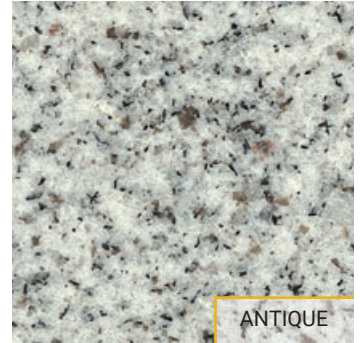

ANTIQUÉ

AVAILABLE FINISHES

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS

Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.27%	0.27%
Density	ASTM C97	168 lb/ft ³	2 691.10 kg/m ³
Compressive strength	ASTM C170	27 700 Psi	190.98 MPa
Flexural strength	ASTM C880	2 020 Psi	13.92 MPa
Modulus of rupture	ASTM C99	2 225 Psi	15.34 MPa
Bulk specific gravity	ASTM C97	2.63 lb/ft ³	42.12 kg/m ³



QUARRY LOCATION:
Jay, ME, U.S.A.

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**